

MCHQ150V-GE series

150W Constant Voltage LED Switching Power Supply



■ Features:

- Constant voltage design
- European AC input range (max. 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- High surge protection: 4kV – differential mode, 6kV – common mode
- IP67 protection class
- Suitable for dry, humid and rainy environment



CONSTANT VOLTAGE **SELV IP67** **PFC** **110** **M** **M** **UK** **CA** **CE** **E**

ELECTRICAL SPECIFICATION

MODEL	MCHQ150V12-GE	MCHQ150V24-GE					
OUTPUT							
RATED VOLTAGE	12V	24V					
RATED CURRENT	12.5A	6.25A					
RATED POWER	150W	150W					
LINE REGULATION	± 1%	± 1%					
LOAD REGULATION	± 1%	± 1%					
VOLTAGE RIPPLE (PK-PK)	± 2%	± 2%					
SETUP, RISE TIME	100ms, 300ms / 230Vac	100ms, 300ms / 230Vac					
INPUT							
VOLTAGE RANGE	180 ÷ 305Vac (refer to Derating Curve)						
FREQUENCY RANGE	47 ÷ 63Hz						
POWER FACTOR (TYP.)	PF > 0.98 / 230VAC at full load (refer to PF curve)						
THD (MAX.)	10% / 230VAC at full load (refer to THD curve)						
EFFICIENCY (TYP.)	92%	93.5%					
AC CURRENT (MAX.)	1.0A/230VAC						
INRUSH CURRENT (MAX.)	65A / 230VAC; T _{WIDTH} = 560µs						
MAX. NO. OF PSU ON CIRCUIT BREAKER	B10	B16	C10	C16	D10	D16	
	12V	5	8	10	8	12	17
	24V	5	8	11	9	13	18
LEAKAGE CURRENT (MAX.)	0.7mA / 230VAC at full load						
NO LOAD POWER CONSUMPTION (MAX.)	0.5W / 230VAC						

MCHQ150V-GE series

150W Constant Voltage LED Switching Power Supply



PROTECTIONS

OVER LOAD	Range: 110 ÷ 170% rated load Type: hiccup mode. Recovers automatically after fault condition is removed.
SHORT CIRCUIT	Type: hiccup mode. Recovers automatically after fault condition is removed.
OVER VOLTAGE	Range: 150% rated voltage Type: shut down output voltage. Re-power on to recovery.
OVER TEMPERATURE	110°C Type: shut down output voltage. Re-power on to recovery.

WORKING ENVIRONMENT

WORKING TEMPERATURE	-40°C ÷ +55°C; tc=90°C (refer to derating curve)
WORKING HUMIDITY	10 ÷ 90% RH non-condensing
STORAGE TEMPERATURE AND HUMIDITY	-40°C ÷ 85°C, 10 ÷ 90% RH non-condensing
Tc	tc=90°C / tc=75°C for 5 years warranty

SAFETY and EMC STANDARDS

SAFETY STANDARDS	Compliance to EN61347-1, EN61347-2-13 , EN 62493
EMC EMISSION	Compliance to EN55015
EMC IMMUNITY	Compliance to EN61547
HARMONIC CURRENT	Compliance to EN61000-3-2 class C, EN61000-3-3
OTHER REGULATIONS	Compliance to Commission Regulation (EU) 2019/2020
WITHSTAND VOLTAGE	IN/OUT: 3200VAC / 5mA, 60s IN/GND: 1600VAC / 5mA, 60s OUT/GND: 1000VAC / 5mA, 60s
INSULATION RESISTANCE	IN/OUT: ≥ 10MΩ / 500VDC
GROUNDING RESISTANCE	≤ 0.1Ω / 25A, 1min
IP PROTECTION CLASS	IP67

MCHQ150V-GE series

150W Constant Voltage LED Switching Power Supply



OTHERS

MTBF	200 000 hours / 25°C, full load, according to MIL-HDBK-217F
LIFETIME	55 000 hours / 230VAC, full load, $t_c=75^\circ\text{C}$
DIMENSIONS	193.6 x 62.5 x 38mm (L x W x H)
WEIGHT AND PACKING	0.74kg ; 15pcs./ctn; ctn dimensions: 28.5 x 23.5 x 25.5cm
PRIMARY CABLE	H05RN-F 105°C 3Gx1.0mm ² , length = 300 ± 30mm
SECONDARY CABLE	12V: SJTW, 2*16AWG / 2*1.31mm ² , 105°C, length = 300 ± 30mm
	24V: SJTW, 2*16AWG / 2*1.31mm ² , 105°C, length = 300 ± 30mm

EAN Code



5 902135 151815



5 902135 151822

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.

2. Power supply is considered as component not intended to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-qualified to comply with EMC Directives.


MECHANICAL SPECIFICATION

INPUT

H05RN-F 105°C 3Gx1.0mm²
length = 300mm ± 30mm

OUTPUT

12V: SJTW, 2*16AWG / 2*1.31mm², 105°C
24V: SJTW, 2*16AWG / 2*1.31mm², 105°C
length = 300mm ± 30mm

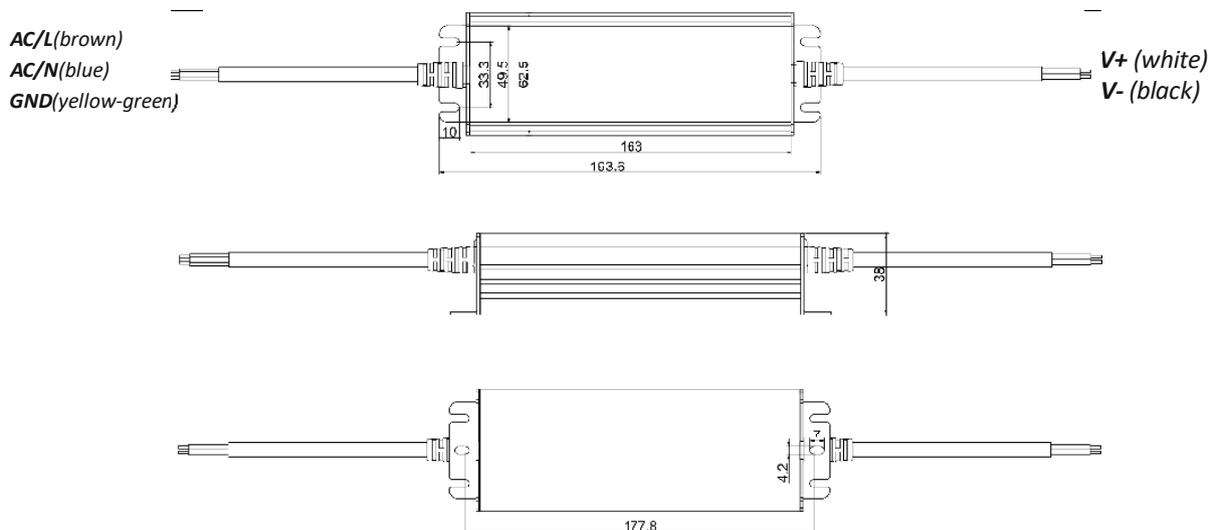


MCHQ150V-GE series

150W Constant Voltage LED Switching Power Supply




CHARACTERISTICS


DERATING CURVE

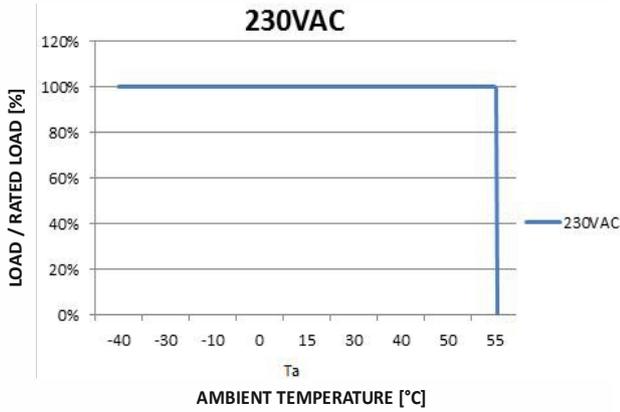


STATIC CHARACTERISTICS

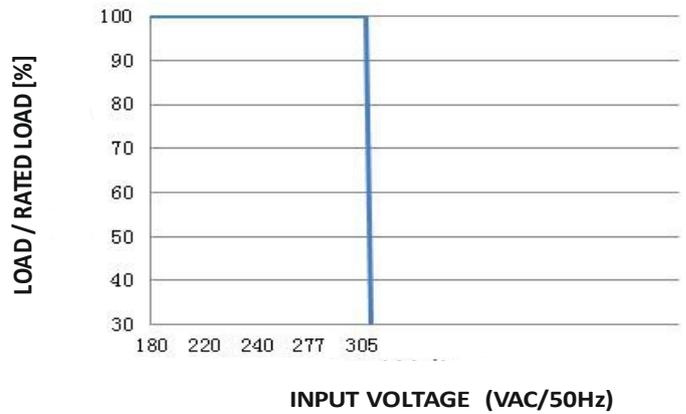


I-V CURVE

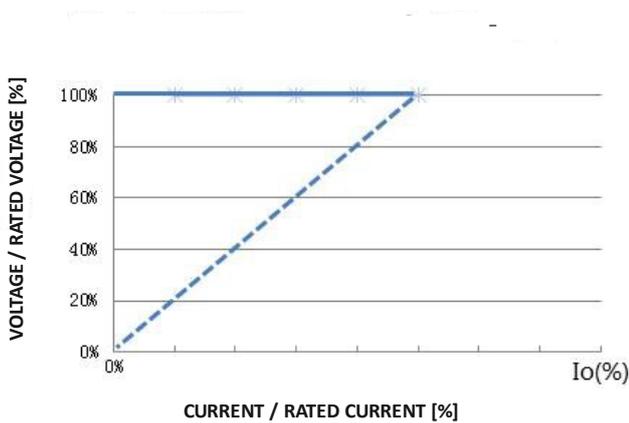

PF CURVE

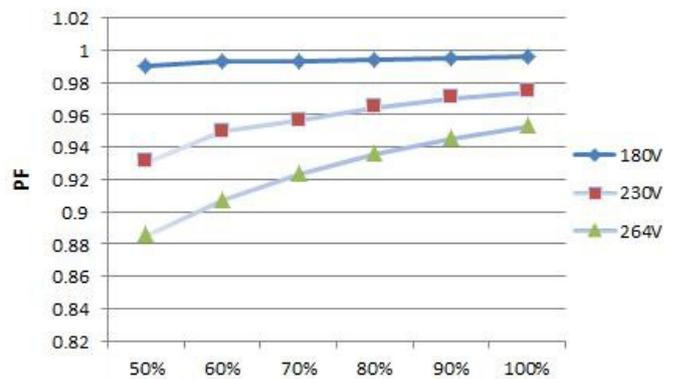

THD Curve

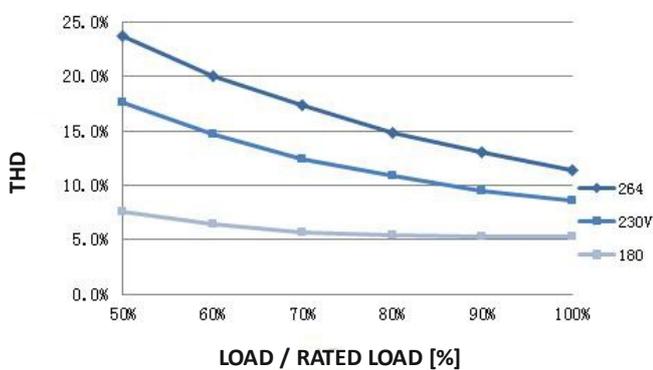

EFFICIENCY CURVE

