


SyncLight Software Usage Guide

This area displays connected lighting devices.

When 2 or more devices are connected, the "Group Control" button will appear.

This solution supports group control for up to 10 devices.

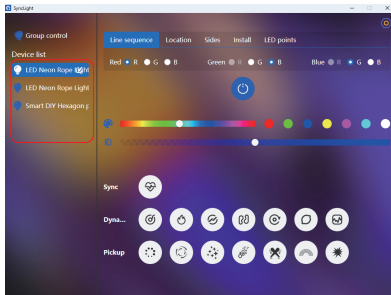

This feature ensures accurate color display by adapting to different LED strip wiring standards.


Setup Steps:

Click the Red button. The device that lights up red indicates the correct wiring.

Click the Green button. The device that lights up green confirms the correct wiring.

Click the Blue button. The device that lights up blue confirms the correct wiring.


Note: If the wire sequence is pre-fixed during shipment, this feature can be hidden.

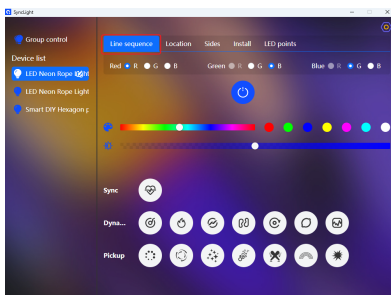

Installation Positions

- Back of the display
- Top of the display
- Bottom of the display
- Middle of the display
- Left side of the display
- Right side of the display
- Both left and right sides of the display

Connected devices will display colors based on their assigned positions.

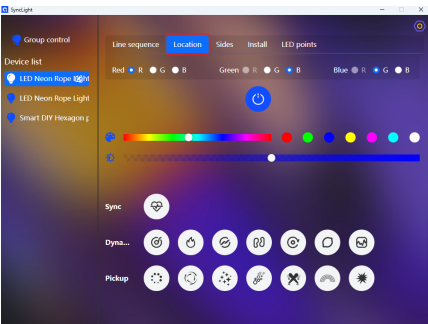


Edge Count Selection

This setting is designed for LED strips and offers two options:

3 Edges

4 Edges

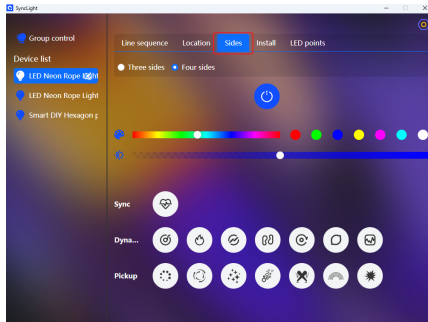


Installation Direction

Two options are available:

Left to Right



Right to Left

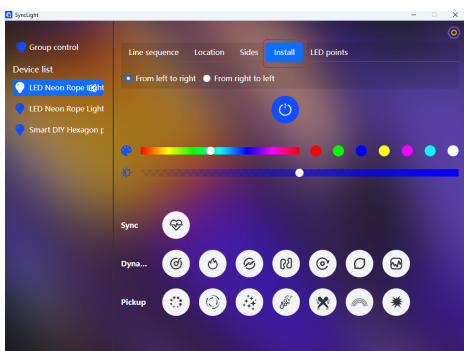

LED Node Configuration

For connected devices, you can set the number of nodes (ICs).

Full-brightness confirmation: The last unit of the device will emit white light when configured correctly.

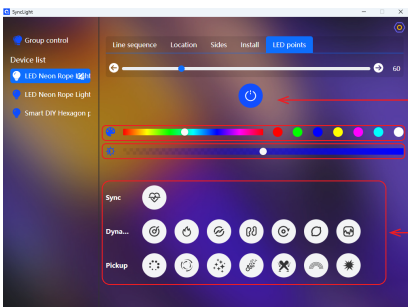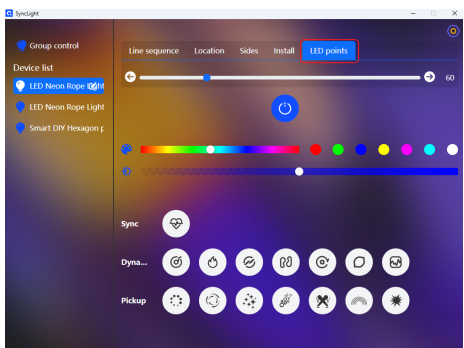

Power On/Off

Solid Color Adjustment

Brightness Adjustment

Mode Selection:
Sync Mode / Rainbow Mode
/ Audio Reactive Mode

Advanced Settings (via the top-right gear icon)

- 1: Select Display
- 2: Enable Auto-Start
- 3: Adjust Sync Speed (rarely used)
- 4: Language Settings: Supports Chinese, English, Spanish, Russian, French, and Japanese.
- 5: Restore Default Settings

