



RF Single Color Wall Mounted Controller

09.283T2.04213



Important: Read All Instructions Prior to Installation

Function introduction

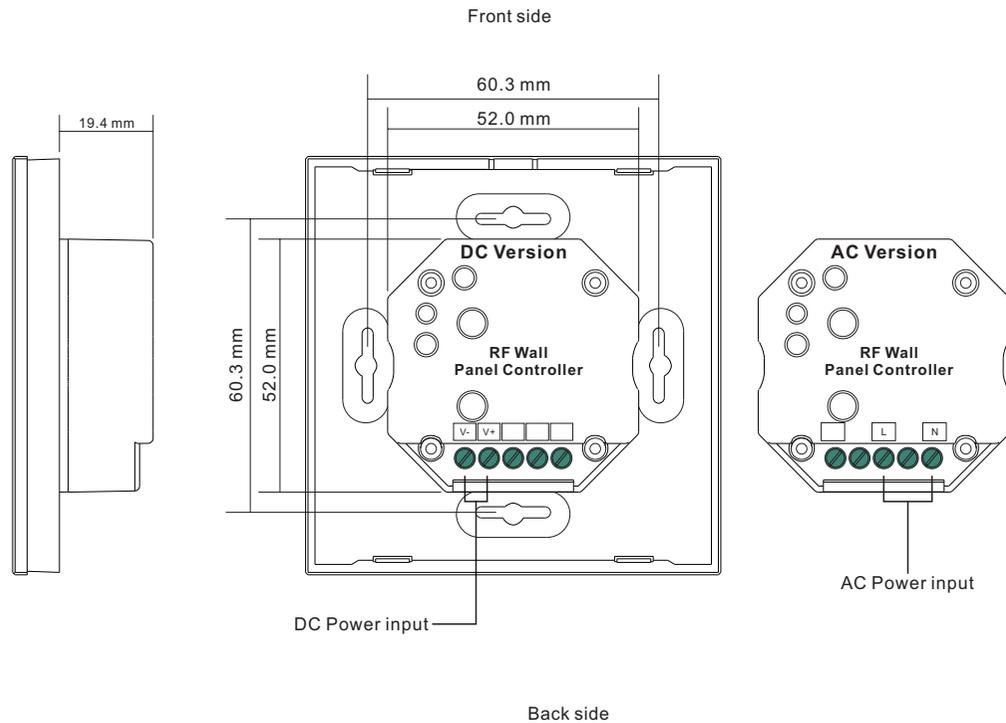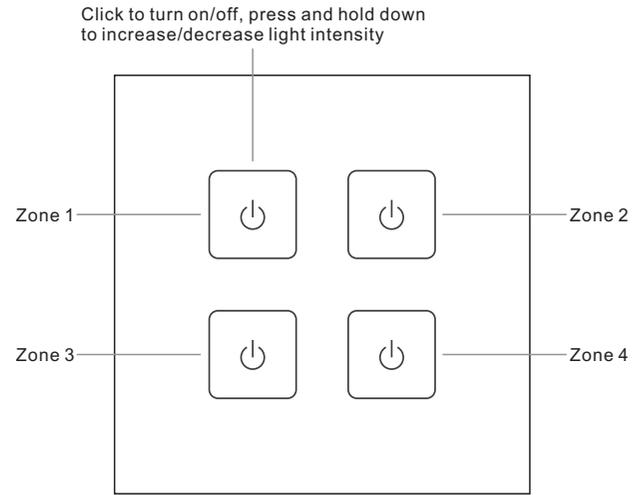

Product Data


Output Signal	DC Version RF signal	AC Version RF signal
Power Supply	12-24VDC	100-240VAC
Power consumption	200 mA	15 mA
Operating temperature	0-40°C	0-40°C
Relative humidity	8% to 80%	8% to 80%
Dimensions	86x86x29.1mm	86x86x29.1mm

- Touch sensitive
- Glass interface(white & black)
- Compatible with all universal series RF receivers
- Control single color
- Control 4 zone of RF receiver synchronously and separately
- Back lighting for finding in the dark
- Waterproof grade: IP20

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Wiring diagram

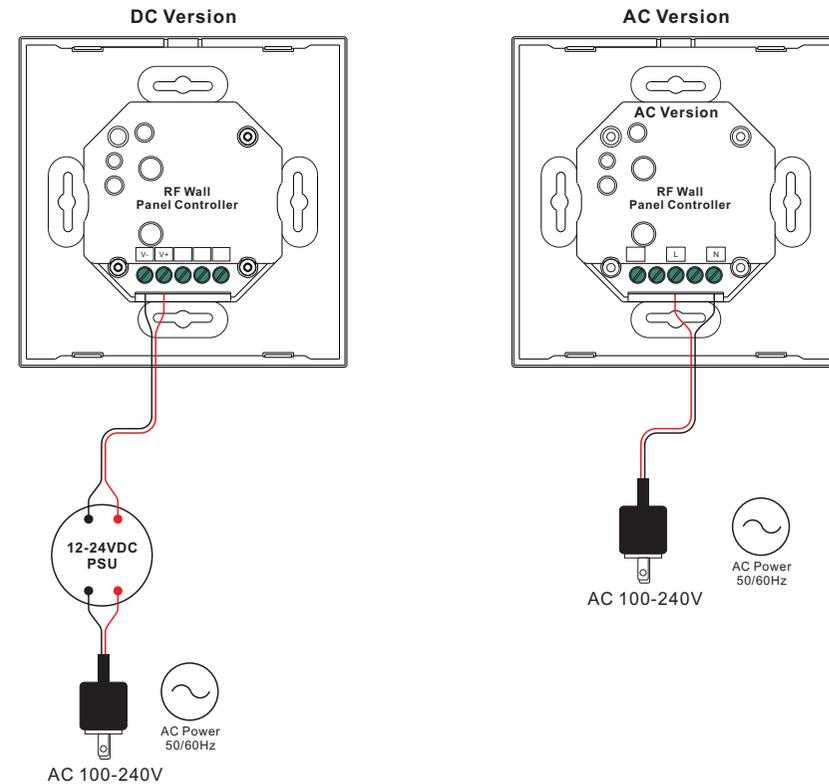

Operation

Pair with RF receivers:

Click "Learning Key" → Click  button of the zone you want to pair with → LED lights connected with the RF receiver will flicker once → The receiver is paired with the remote successfully.

How to delete the pairing:

Press and hold down "Learning Key" on the receiver for over 3 seconds until connected LED lights flicker twice, which means the pairing is deleted successfully.

Installation

